

**B. Tech Degree IV Semester Examination, April 2008****ME 403 ADVANCED MECHANICS OF SOLIDS**

(2006 Scheme)

Time : 3 Hours

Maximum Marks : 100

**PART – A**(Answer ALL questions)

(8 x 5 = 40)

- I. (a) Explain the steps involved in the construction of Mohr's circle for strain measurement.  
 (b) State and explain St. Venant's Principle.  
 (c) Explain the relationship between stress components in rectangular co-ordinates and polar co-ordinates.  
 (d) Obtain the equations of equilibrium for a rotating discs.  
 (e) Explain the term stress ellipsoid.  
 (f) State and explain Castigliano's theorem with examples.  
 (g) Explain the term shear centre.  
 (h) Obtain the expression for twist of a thin tube.

**PART – B**

- II. (a) For a stress function  $\phi(r, \theta)$ , the values of  $\sigma_r$ ,  $\sigma_\theta$  and  $\tau_{r\theta}$  are given below. Show that, in the absence of body forces, these satisfies differential equations

$$\text{of equilibrium } \sigma_r = \frac{1}{r} \frac{\partial \phi}{\partial v} + \frac{1}{r^2} \frac{\partial^2 \phi}{\partial \theta^2}, \quad \sigma_\theta = \frac{\partial^2 \phi}{\partial r^2},$$

$$\tau_{r\theta} = -\frac{1}{r} \frac{\partial^2 \phi}{\partial r \partial \theta} + \frac{1}{r^2} \frac{\partial \phi}{\partial \theta}. \quad (5)$$

- (b) The displacement field is given by

$$U_x = K(x^2 + 2z), U_y = K(4x + 2y^2 + z), U_z = 4Kz^2. \quad K \text{ is a very small constant. What are the strains at } (2, 2, 3) \text{ in direction?}$$


$$(i) \quad n_x = 0, \quad n_y = \frac{1}{\sqrt{2}}, \quad n_z = \frac{1}{\sqrt{2}}$$

$$(ii) \quad n_x = 1, \quad n_y = n_z = 0$$

$$(iii) \quad n_x = 0.6, \quad n_y = 0, \quad n_z = 0.8 \quad (10)$$

**OR**

- III. (a) The arrangement of a 3 element delta rosette is given below. Find the principal strains. (5)

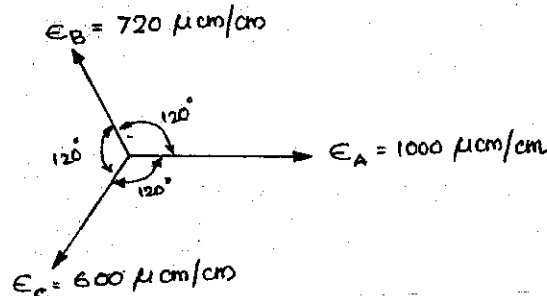

- (b) The state of stress at a point for a given reference is given below. If a new set of axes  $x'y'z'$  is formed by rotating  $x y z$  through  $60^\circ$  about  $z$  axis, find the new stress tensor  $\tau_{ij}$

$$\tau_{ij} = \begin{Bmatrix} 200 & 100 & 0 \\ 100 & 0 & 0 \\ 0 & 0 & 500 \end{Bmatrix} \quad (10)$$

**(Turn Over)**

- IV. (a) A steel shaft 100 mm in diameter has a 500 mm diameter steel disc shrunk on it. Permissible shrinkage strain is 0.0008. Find

- (i) radial and tangential stresses at stand still  
 (ii) speed at which the disc will be loosened from shaft  
 (iii) shrinkage pressure at half the speed arrived above.

Given  $E = 2 \times 10^6 \text{ Kg/cm}^2$   $\mu = 0.3$   $\delta = 8 \text{ gm/cm}^3$ . (9)

- (b) Derive the stress equilibrium equations in polar co-ordinates. (6)

OR

- V. (a) Derive the expression for the radial and tangential stress components developed in a disk rotating at an angular velocity  $\omega$ . (7)

- (b) Determine the radial and circumferential stress due to the internal pressure

$p = 1.96 \times 10^5 \text{ kPa}$  in a composite tube consisting of an inner copper tube of radii 10cm and 20cm and an outer steel tube of external radius 40 cm.

$\nu_{st} = 0.3$ ,  $\nu_{cu} = 0.34$   $E_{st} = 1.96 \times 10^8 \text{ kPa}$ ,  $E_{cu} = 0.98 \times 10^8 \text{ kPa}$ . Calculate these stresses at the inner and outer radius points of each tube. Determine the contact pressure also. (8)


- VI. At a point P, the rectangular stress components are,  $\sigma_x = 1$ ,  $\sigma_y = -2$ ,

$\sigma_z = 4$ ,  $\tau_{xy} = 2$ ,  $\tau_{yz} = -3$  and  $\tau_{zx} = 1$ , all in units of kPa. Find the principal stresses and their directions. (15)


OR

- VII. (a) An I beam has a depth  $d$ , width  $B$ , thickness of flange and web as  $t$  and  $b$ , and moment of inertia  $I$ . Find the total deflection due to bending and shear for simply supported span of  $L$ , loaded by a concentrated load of  $W$  at the centre by energy methods. (8)

- (b) Find the central deflection of a simply supported beam of span with triangular loading as given below. (7)

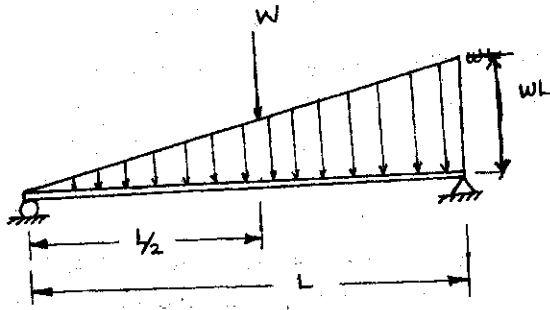

- VIII. Determine the shear stress distribution in a channel section of a cantilever beam subjected to a load  $F$ . Also locate the shear centre of the section. (15)

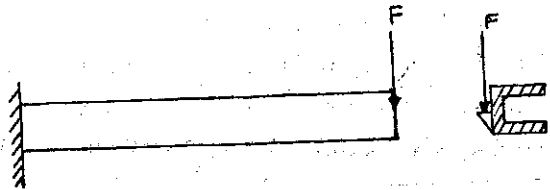

OR

- IX. Derive the expression for maximum shear stress and angle of twist for an elliptical shaft. (15)

\*\*\*